







慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数

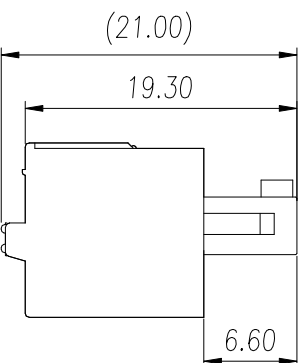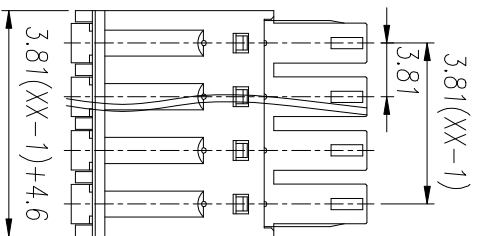

等级	Use Group	B	C	D
额定电压	Rated Voltage	N	300	-
额定电流	Rated Current	A	8	-
连接范围	Wire Range	28-16		
单/多芯线	Solid/Stranded	AWG		
耐电压	Withstanding Voltage	1800V/1min		

IEC 技术参数

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	N	160	160
额定电流	Rated Current	A	8	8
额定冲击电压	Impulse withstand voltage	[kV]	25	25
导体横截面积	Conductor cross section	[mm ²]	0.2-1.5	0.2-1.5
导体/柔性导线	Solid/flexible			

材料

绝缘材料	Insulation Material	PA66
阻燃等级	Inflammability	UL94V-0
导体材料	Conductor Material	符合全 Copper alloy
导体表面镀层	Conductive Coating	镀锡层 Sn Plated

一般参数

间距	Pitch / 极数	Poles	[mm] / [P]	3.81 / (2P-24)
剥线长度	Stripping Length		[mm]	7-8
螺丝	Screw/扭矩	Torque(Max)	[N.m]	-
工作温度	Operating temperature		[°C]	-40~105
焊接温度	Soldering temperature			-
引脚尺寸	Pin Dimensions		[mm]	-
PCB板孔径	PCB Hole Diameter		[mm]	-

linear dimension (Tolerances Standard GB/T 14486-2008)


variable range	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 160
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 2:1



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

第三视角 THIRD ANGLE PROJECTION



版本 / REV V0

名称 / TITLE WJ15EDGKD-3.81-XXP-1YY-00A